


COOLING CAPACITY: 18,000 TO 60,000 BTU/H
HEATING CAPACITY: 18,000 TO 60,000 BTU/H

**HIGH-EFFICIENCY
 SPLIT SYSTEM HEAT PUMP
 UP TO 16 SEER & 9.0 HSPF
 1½ TO 5 TONS**

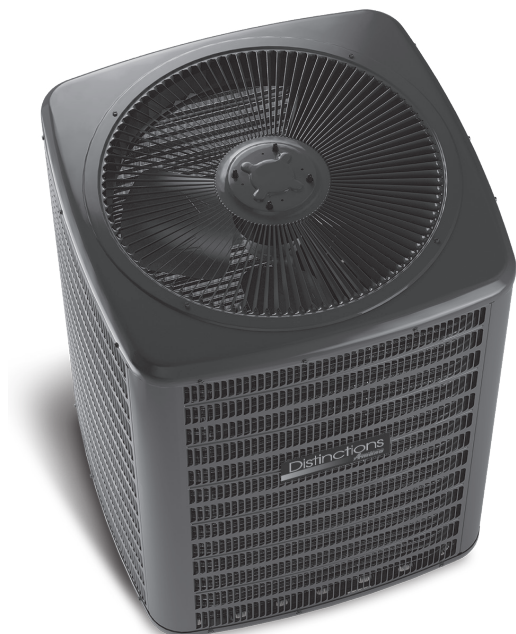

Contents

Nomenclature..... 2
 Product Specifications..... 3
 Expanded Cooling Data..... 4
 Expanded Heating Data..... 18
 Performance Data 20
 AHRI Ratings 21
 Dimensions 33
 Wiring Diagrams 34
 Accessories 36

Standard Features

- High-efficiency scroll compressor OR Two-Stage Copeland® UltraTech™ scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Single-speed ECM condenser fan motor
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Amana® Distinctions® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Service ports and controls are accessible while unit is operating
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)










COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 9001 ■

COMPANY WITH
 ENVIRONMENTAL SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 14001 ■

* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

	G	S	Z	16	036	1	AA	
	1	2	3	4,5	6,7,8	9	10,11	
Brand	G Amana® Distinctions® Brand						Engineering *	
							Major & Minor revisions * Not used for inventory control.	
Product Category	S Split System							Electrical
								1 - 208/230 V, 1 Phase, 60 Hz
Unit Type	X Condenser R-410A							Nominal Capacity
	Z Heat Pump R-410A							018 - 1½ tons 042 3½ Tons
								024 - 2 tons 048 4 Tons
Efficiency	13 13 SEER 16 16 SEER							030 - 2½ tons 060 5 Tons
	14 14 SEER 18 18 SEER							036 - 3 tons

	GSZ16 0181B*	GSZ16 0241B*	GSZ16 0301B*	GSZ16 0361B*	GSZ16 0421B*	GSZ16 0481B*	GSZ16 0601B*
NOMINAL CAPACITIES							
Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Decibels	72	75	75	73	73	74	76
COMPRESSOR							
RLA	9.0	10.9	13.4	14.1	16.7	19.9	28.8
LRA	47.5	62.9	72.5	72.2	109.0	109.0	152.9
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR							
Horsepower	1/6	1/6	1/6	1/4	1/4	1/4	1/6
FLA	0.95	1.1	1.1	1.30	1.2	1.30	1
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge (oz.)	140	150	160	175	180	231	291
ELECTRICAL DATA							
Volts/Phase (60 Hz)	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Minimum Circuit Ampacity ²	12.2	14.7	18.0	18.9	22.1	26.2	37
Max. Overcurrent Protection ³	20	25	30	30	35	45	60
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
UNIT WEIGHTS							
Equipment Weight	174	180	186	220	226	250	306
Shipping Weight	189	200	206	240	237	270	326
ENERGY STAR® CERTIFIED ^							
							

^ Energy Star Notes

Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR requirements. See Page 21 for all ENERGY STAR certified combinations as of this document's revision date.

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE															
		65°F				75°F				85°F				95°F				105°F				115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
	MBh	24.4	24.8	25.5	26.6	24.2	24.5	25.3	26.4	23.6	23.9	24.6	25.8	22.5	22.8	23.5	24.7	21.1	21.5	22.2	23.3	19.9	20.2	21.0	22.1				
	S/T	0.62	0.54	0.40	0.39	0.62	0.55	0.41	0.39	0.65	0.57	0.43	0.39	1.00	0.59	0.45	0.44	1.00	0.62	0.48	0.48	1.00	0.67	0.53	0.53				
	ΔT	20	18	15	14	20	18	14	14	20	18	15	14	20	18	14	14	19	18	14	14	21	19	15	15				
	kW	1.33	1.32	1.32	1.33	1.49	1.48	1.48	1.48	1.66	1.66	1.66	1.66	1.86	1.86	1.85	1.85	2.07	2.07	2.07	2.07	2.32	2.32	2.32	2.32				
	Amps	5.5	5.5	5.5	5.5	6.2	6.2	6.2	6.2	7.0	7.0	7.0	7.0	7.9	7.9	7.9	7.9	8.9	8.9	8.9	8.9	10.1	10.1	10.0	10.0				
	HI/PR	241	242	243	243	279	280	281	281	318	319	321	321	361	362	364	364	407	408	410	410	457	458	459	459				
	LO/PR	126	127	131	131	133	135	138	138	140	142	145	145	146	147	151	151	151	153	156	156	158	160	163	163				
	MBh	24.7	25.1	25.8	26.2	24.5	24.9	25.6	26.0	23.9	24.2	25.0	25.3	22.8	23.1	23.9	24.2	21.4	21.8	22.5	22.9	20.2	20.6	21.3	21.7				
	S/T	0.68	0.60	0.46	0.45	0.69	0.61	0.47	0.47	0.71	0.63	0.50	0.50	1.00	0.65	0.52	0.52	1.00	0.68	0.54	0.54	1.00	0.73	0.59	0.59				
ΔT	19	17	13	13	19	17	13	13	19	17	14	14	19	17	13	13	18	17	13	13	19	18	14	14					
kW	1.33	1.33	1.33	1.33	1.49	1.49	1.49	1.49	1.67	1.67	1.67	1.67	1.86	1.86	1.86	1.86	2.08	2.08	2.08	2.08	2.33	2.33	2.33	2.33					
Amps	5.5	5.5	5.5	5.5	6.3	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.0	7.9	7.9	7.9	8.9	8.9	8.9	8.9	10.1	10.1	10.1	10.1					
HI/PR	243	244	245	245	281	282	283	283	320	321	323	323	363	364	366	366	409	411	412	412	459	460	462	462					
LO/PR	128	129	132	132	135	137	140	140	142	144	147	147	148	149	152	152	153	155	158	158	160	162	165	165					
MBh	25.1	25.5	26.2	26.2	24.9	25.2	26.0	26.0	24.3	24.6	25.3	25.3	23.2	23.5	24.2	24.2	21.8	22.2	22.9	22.9	20.6	21.0	21.7	21.7					
S/T	0.71	0.64	0.50	0.50	0.72	0.64	0.50	0.50	1.00	0.67	0.53	0.53	1.00	0.69	0.55	0.55	1.00	0.71	0.57	0.57	1.00	1.00	0.63	0.63					
ΔT	18	16	12	12	18	16	12	12	18	16	13	13	18	16	12	12	17	16	12	12	19	17	13	13					
kW	1.34	1.34	1.34	1.34	1.50	1.50	1.50	1.50	1.68	1.68	1.67	1.67	1.87	1.87	1.87	1.87	2.09	2.09	2.08	2.08	2.34	2.34	2.34	2.34					
Amps	5.6	5.6	5.5	5.5	6.3	6.3	6.3	6.3	7.1	7.1	7.1	7.1	8.0	8.0	8.0	8.0	9.0	9.0	9.0	9.0	10.1	10.1	10.1	10.1					
HI/PR	245	246	247	247	283	284	285	285	322	323	325	325	365	366	368	368	411	413	414	414	461	462	463	463					
LO/PR	130	131	134	134	137	139	142	142	144	146	149	149	150	151	154	154	155	157	160	160	162	164	167	167					

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) Rating Conditions.
 kW = Total system power
 Amps = Outdoor unit amps (compressor + fan)

IDB		Outdoor Ambient Temperature																																																							
		65°F							75°F							85°F							95°F							105°F							115°F																				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																								
1050	Airflow	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-
	MBh	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.69	0.62	0.48	-	1.00	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-	1.00	0.66	0.52	-	1.00	0.71	0.58	-
	S/T	19	17	14	-	19	17	14	-	20	18	14	-	19	17	14	-	19	17	14	-	20	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	20	18	14	-	19	17	14	-	20	18	14	-
	Δ T	1.89	1.88	1.88	-	2.12	2.12	2.11	-	2.38	2.38	2.37	-	2.66	2.66	2.65	-	2.97	2.97	2.97	-	3.34	3.34	3.33	-	2.97	2.97	2.97	-	3.34	3.34	3.33	-	2.97	2.97	2.97	-	3.34	3.34	3.33	-	2.97	2.97	2.97	-	3.34	3.34	3.33	-								
	kW	7.7	7.7	7.7	-	8.8	8.8	8.7	-	10.0	10.0	9.9	-	11.2	11.2	11.2	-	12.7	12.7	12.7	-	14.4	14.4	14.3	-	12.7	12.7	12.7	-	14.4	14.4	14.3	-	12.7	12.7	12.7	-	14.4	14.4	14.3	-	12.7	12.7	12.7	-	14.4	14.4	14.3	-								
	Amps	248	249	251	-	287	288	290	-	328	329	331	-	372	373	374	-	419	420	422	-	469	470	472	-	419	420	422	-	469	470	472	-	419	420	422	-	469	470	472	-	419	420	422	-	469	470	472	-								
HI PR	124	125	128	-	131	133	136	-	147	148	149	-	163	165	168	-	182	184	188	-	211	213	216	-	182	184	188	-	211	213	216	-	182	184	188	-	211	213	216	-	182	184	188	-	211	213	216	-									
LO PR	35.9	36.4	37.4	-	35.6	36.1	37.1	-	34.7	35.2	36.2	-	33.1	33.6	34.6	-	31.2	31.7	32.7	-	29.4	29.9	31.0	-	31.2	31.7	32.7	-	29.4	29.9	31.0	-	31.2	31.7	32.7	-	29.4	29.9	31.0	-	31.2	31.7	32.7	-	29.4	29.9	31.0	-									
1200	MBh	0.70	0.62	0.49	-	0.71	0.63	0.50	-	0.73	0.66	0.52	-	1.00	0.67	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-								
	S/T	18	16	13	-	18	16	13	-	17	16	13	-	17	15	12	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-								
	Δ T	1.90	1.89	1.89	-	2.13	2.13	2.12	-	2.40	2.40	2.39	-	2.68	2.68	2.67	-	2.99	2.99	2.99	-	3.36	3.36	3.36	-	2.99	2.99	2.99	-	3.36	3.36	3.36	-	2.99	2.99	2.99	-	3.36	3.36	3.36	-																
	kW	7.8	7.8	7.7	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	11.3	11.3	11.3	-	12.7	12.7	12.7	-	14.4	14.4	14.4	-	12.7	12.7	12.7	-	14.4	14.4	14.4	-	12.7	12.7	12.7	-	14.4	14.4	14.4	-																
	Amps	251	252	253	-	289	290	292	-	330	331	333	-	374	375	377	-	421	422	424	-	472	473	474	-	421	422	424	-	472	473	474	-	421	422	424	-	472	473	474	-																
	HI PR	126	128	131	-	133	135	138	-	140	141	145	-	148	150	153	-	163	165	168	-	191	193	196	-	163	165	168	-	191	193	196	-	163	165	168	-	191	193	196	-																
LO PR	36.7	37.2	38.2	-	36.4	36.9	37.9	-	35.5	35.9	37.0	-	33.9	34.4	35.4	-	32.0	32.5	33.5	-	30.2	30.7	31.8	-	32.0	32.5	33.5	-	30.2	30.7	31.8	-	32.0	32.5	33.5	-	30.2	30.7	31.8	-																	
1350	MBh	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.70	0.57	-	1.00	0.76	0.62	-	1.00	0.70	0.57	-	1.00	0.76	0.62	-	1.00	0.70	0.57	-	1.00	0.76	0.62	-																
	S/T	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-																
	Δ T	1.91	1.90	1.90	-	2.14	2.14	2.13	-	2.40	2.40	2.39	-	2.68	2.68	2.67	-	2.99	2.99	2.99	-	3.36	3.36	3.36	-	2.99	2.99	2.99	-	3.36	3.36	3.36	-																								
	kW	7.8	7.8	7.8	-	8.9	8.9	8.8	-	10.1	10.0	10.0	-	11.3	11.3	11.3	-	12.8	12.8	12.8	-	14.5	14.5	14.4	-	12.8	12.8	12.8	-	14.5	14.5	14.4	-																								
	Amps	253	254	256	-	292	293	295	-	332	334	335	-	376	377	379	-	424	425	426	-	474	475	477	-	424	425	426	-	474	475	477	-																								
	HI PR	129	130	133	-	136	138	141	-	143	144	147	-	148	150	153	-	163	165	168	-	191	193	196	-	163	165	168	-	191	193	196	-																								

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.
Shaded area reflects ACCA (TVA) Rating Conditions.
kW = Total system power
Amps = Outdoor unit amps (compressor + fan)

GSZ160181B* - ASPT29B14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	23.1	21.7	20.3	18.9	18.0	17.4	15.7	14.2	13.0	12.0	11.4	11.0	10.5	9.4	8.2	7.0	5.9
T/R	20.6	19.5	18.4	17.3	16.7	16.1	14.6	13.1	12.0	11.1	10.5	10.2	9.8	8.7	7.6	6.5	5.4
kW	1.37	1.35	1.34	1.33	1.32	1.31	1.30	1.29	1.27	1.26	1.25	1.24	1.23	1.22	1.21	1.20	1.18
Amps	6.7	6.2	5.7	5.3	5.1	4.9	4.6	4.4	4.1	3.9	3.7	3.6	3.5	3.3	3.1	2.8	2.5
COP	4.95	4.69	4.43	4.17	4.00	3.87	3.55	3.23	2.98	2.80	2.67	2.60	2.50	2.25	1.99	1.72	1.45

GSZ160241B* - ASPT29B14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	30.9	29.0	27.1	25.2	24.0	23.1	20.9	18.8	17.2	15.9	15.0	14.5	13.9	12.3	10.7	9.1	7.5
T/R	27.5	26.0	24.6	23.1	22.2	21.4	19.4	17.4	15.9	14.7	13.9	13.4	12.8	11.4	9.9	8.4	7.0
kW	1.83	1.81	1.79	1.77	1.76	1.75	1.73	1.71	1.69	1.67	1.65	1.63	1.63	1.61	1.58	1.56	1.54
Amps	9.0	8.2	7.6	7.1	6.8	6.6	6.2	5.8	5.5	5.2	4.9	4.7	4.6	4.3	4.0	3.7	3.3
COP	4.94	4.68	4.43	4.17	4.00	3.87	3.54	3.23	2.98	2.80	2.67	2.60	2.50	2.24	1.98	1.71	1.43

GSZ160301B* - ASPT37C14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	39.1	36.4	33.9	31.1	29.4	28.0	24.7	21.7	19.2	17.4	16.0	15.2	14.3	11.9	9.5	7.2	4.8
T/R	35.1	32.9	30.7	28.5	27.2	26.0	22.9	20.1	17.8	16.1	14.8	14.1	13.2	11.0	8.8	6.6	4.4
kW	2.42	2.35	2.27	2.20	2.15	2.12	2.05	1.98	1.90	1.83	1.76	1.71	1.68	1.61	1.54	1.46	1.39
Amps	11.0	10.1	9.3	8.7	8.3	8.1	7.6	7.1	6.7	6.4	6.0	5.8	5.7	5.3	4.9	4.5	4.0
COP	4.73	4.55	4.37	4.15	4.00	3.87	3.53	3.21	2.96	2.78	2.66	2.60	2.48	2.16	1.82	1.43	1.01

GSZ160361B* - ASPT37C14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	44.5	41.9	39.2	36.7	35.0	33.8	30.8	28.0	25.6	23.9	22.7	22.0	21.1	19.0	16.8	14.6	12.5
T/R	39.6	37.6	35.6	33.6	32.4	31.3	28.5	25.9	23.7	22.1	21.0	20.4	19.6	17.6	15.6	13.6	11.5
kW	2.62	2.60	2.59	2.57	2.56	2.56	2.54	2.53	2.52	2.50	2.49	2.48	2.47	2.46	2.45	2.43	2.42
Amps	13.3	12.2	11.3	10.5	10.1	9.8	9.2	8.7	8.2	7.8	7.3	7.1	6.9	6.5	6.0	5.5	5.0
COP	4.99	4.72	4.45	4.18	4.00	3.87	3.55	3.24	2.98	2.80	2.67	2.60	2.50	2.26	2.01	1.76	1.51

Above information is for nominal CFM and 70 degree indoor dry bulb. Instantaneous capacity listed.

Goodman Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

GSZ160421B* - ASPT47D14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	51.0	47.9	44.9	41.9	40.0	38.6	35.2	31.9	29.2	27.2	25.8	25.0	24.0	21.5	19.0	16.5	14.0
T/R	45.4	43.1	40.7	38.4	37.0	35.8	32.6	29.5	27.0	25.2	23.9	23.1	22.2	19.9	17.6	15.3	13.0
kW	3.31	3.26	3.21	3.16	3.13	3.11	3.05	3.00	2.95	2.90	2.85	2.82	2.80	2.75	2.69	2.64	2.59
Amps	16.4	15.1	14.0	13.0	12.5	12.2	11.4	10.8	10.2	9.6	9.1	8.8	8.6	8.1	7.5	6.9	6.2
COP	4.51	4.31	4.10	3.89	3.75	3.64	3.37	3.11	2.90	2.75	2.65	2.60	2.51	2.29	2.07	1.83	1.58

GSZ160481B* - ASPT49D14A* + TXV

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	62.1	57.9	53.7	49.6	47.0	45.0	40.0	35.5	31.8	29.0	26.9	25.8	24.4	20.9	17.3	13.8	10.3
T/R	55.3	52.0	48.8	45.5	43.5	41.7	37.0	32.8	29.4	26.9	24.9	23.9	22.6	19.3	16.0	12.8	9.5
kW	3.83	3.72	3.62	3.51	3.44	3.40	3.29	3.19	3.08	2.97	2.86	2.80	2.76	2.65	2.54	2.44	2.33
Amps	17.9	16.4	15.2	14.1	13.5	13.2	12.4	11.6	11.0	10.4	9.8	9.5	9.3	8.7	8.1	7.4	6.6
COP	4.75	4.56	4.35	4.14	4.00	3.88	3.56	3.26	3.02	2.86	2.75	2.70	2.59	2.31	2.00	1.66	1.29

GSZ160601B* - CAPF4961D6D* + TXV / MBVC2000AA-1A*

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	76.8	72.1	67.5	62.9	60.0	57.9	52.6	47.5	43.4	40.4	38.2	37.0	35.5	31.6	27.8	24.0	20.1
T/R	68.3	64.8	61.2	57.7	55.6	53.6	48.7	44.0	40.2	37.4	35.4	34.3	32.8	29.3	25.7	22.2	18.6
kW	5.05	4.99	4.92	4.86	4.82	4.79	4.73	4.66	4.60	4.53	4.47	4.43	4.40	4.33	4.27	4.20	4.14
Amps	25.2	23.2	21.4	19.9	19.0	18.5	17.4	16.3	15.4	14.6	13.8	13.3	13.0	12.1	11.3	10.3	9.2
COP	4.45	4.23	4.02	3.80	3.65	3.54	3.26	2.99	2.77	2.61	2.51	2.45	2.36	2.14	1.91	1.67	1.43

Above information is for nominal CFM and 70 degree indoor dry bulb. Instantaneous capacity listed.

Goodman Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

GSZ160181B* + ASPT29B14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	19,300	14,089	5,211	1,120
80	19,050	14,189	4,862	1,185
85	18,800	14,288	4,512	1,250
90	18,400	14,164	4,236	1,325
95	18,000	14,040	3,960	1,400
100	17,500	13,820	3,680	1,480
105	17,000	13,600	3,400	1,560
110	16,550	14,850	1,700	1,655
115	16,100	16,100	0	1,750
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,400	13,746	3,654	1,400

GSZ160301B* + ASPT37C14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 975 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,900	22,557	8,343	1,770
80	30,500	22,717	7,784	1,880
85	30,100	22,876	7,224	1,990
90	29,450	22,670	6,780	2,110
95	28,800	22,464	6,336	2,230
100	28,000	22,112	5,888	2,365
105	27,200	21,760	5,440	2,500
110	26,450	21,803	4,648	2,660
115	25,700	21,845	3,855	2,820
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,800	21,962	5,838	2,240

GSZ160421B* + ASPT47D14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1140 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	41,800	28,842	12,958	2,400
80	41,300	28,905	12,395	2,550
85	40,800	28,968	11,832	2,700
90	39,900	28,719	11,181	2,860
95	39,000	28,470	10,530	3,020
100	37,900	28,035	9,865	3,205
105	36,800	27,600	9,200	3,390
110	35,800	27,720	8,080	3,615
115	34,800	27,840	6,960	3,840
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	27,824	9,776	3,030

GSZ160601B* - CAPF4961D6D* + TXV/ MBVC2000AA-1A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1850 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	60,600	44,238	16,362	3,610
80	59,850	44,282	15,569	3,840
85	59,100	44,325	14,775	4,070
90	57,800	43,915	13,885	4,315
95	56,500	43,505	12,995	4,560
100	54,900	42,806	12,094	4,835
105	53,300	42,107	11,193	5,110
110	51,900	42,264	9,637	5,430
115	50,500	42,420	8,080	5,750
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	54,500	42,510	11,990	4,560

GSZ160241B* + ASPT29B14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 800 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	25,700	18,761	6,939	1,490
80	25,400	18,919	6,482	1,580
85	25,100	19,076	6,024	1,670
90	24,550	18,898	5,652	1,765
95	24,000	18,720	5,280	1,860
100	23,350	18,440	4,910	1,970
105	22,700	18,160	4,540	2,080
110	22,050	18,175	3,875	2,205
115	21,400	18,190	3,210	2,330
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	23,100	18,249	4,851	1,860

GSZ160361B* + ASPT37C14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1060 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	36,700	26,424	10,276	2,090
80	36,250	26,637	9,613	2,225
85	35,800	26,850	8,950	2,360
90	35,000	26,592	8,408	2,505
95	34,200	26,334	7,866	2,650
100	33,250	25,926	7,325	2,815
105	32,300	25,517	6,783	2,980
110	31,400	25,569	5,832	3,170
115	30,500	25,620	4,880	3,360
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	33,000	25,740	7,260	2,660

GSZ160481B* + ASPT49D14A* + TXV				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	48,800	34,160	14,640	2,800
80	48,200	34,454	13,746	2,975
85	47,600	34,748	12,852	3,150
90	46,550	34,437	12,114	3,340
95	45,500	34,125	11,375	3,530
100	44,250	33,618	10,633	3,740
105	43,000	33,110	9,890	3,950
110	41,800	33,201	8,599	4,200
115	40,600	33,292	7,308	4,450
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	43,900	33,364	10,536	3,530

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0181B*	ACNF31XX16A*		17,000	13,600	14.0	12.0	16,400	13,400	17,000	8.2	11,900	600	8740462
	ACNF31XX16A*+TXV		17,200	13,800	14.5	12.2	16,600	13,400	17,600	8.5	11,900	600	8740463
	ARUF31B14A*+TXV		17,000	13,600	14.5	12.0	16,400	13,400	17,400	8.2	11,000	560	8331268
	AVPTC25B14A*		17,400	14,000	15.0	12.5	16,800	13,600	17,800	8.5	10,500	640	8996198
	AVPTC29B14A*		17,800	14,200	16.0	13.0	17,200	14,000	18,000	9.0	11,000	585	8996199
	AWUF19XX16A*+TXV		17,000	13,600	14.5	12.0	16,400	13,400	17,400	8.2	10,000	580	8331266
	AWUF31XX16A*+TXV		17,000	13,600	16.0	13.0	16,400	13,400	17,200	8.5	10,000	620	8331267
	CA*F3137*6A*+TXV	G*VC960403BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8327048
	CA*F3137*6A*+TXV	G*VC960603BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8327049
	CA*F3137*6A*+TXV	G*VC960803BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8327050
	CA*F3137*6A*+TXV	A*VC960403BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8327073
	CA*F3137*6A*+TXV	A*VC960603BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8327074
	CA*F3137*6A*+TXV	A*VC960803BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8327075
	CA*F3137*6A*+TXV	G*VM970603BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8332190
	CA*F3137*6A*+TXV	G*VM970803BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8332191
	CA*F3137*6A*+TXV	A*VM970603BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8332209
	CA*F3137*6A*+TXV	A*VM970803BNA*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	610	8332210
	CA*F3137*6A*+TXV	G*VC80604B*B*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8601427
	CA*F3137*6A*+TXV	A*VC80604B*B*	17,600	14,200	16.0	13.0	17,000	13,800	17,600	9.0	10,000	620	8601565
	CA*F3137*6A*+TXV	G*VC80603B*B*	17,600	14,200	15.0	12.5	17,000	13,800	17,600	8.5	10,000	600	9924257
	CA*F3137*6A*+TXV	G*VC80803B*B*	17,600	14,200	15.0	12.5	17,000	13,800	17,600	8.5	10,000	600	9924261
	CA*F3636*6D*+TXV	G*VC960403BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8327045
	CA*F3636*6D*+TXV	G*VC960603BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8327046
	CA*F3636*6D*+TXV	G*VC960803BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8327047
	CA*F3636*6D*+TXV	A*VC960403BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8327070
	CA*F3636*6D*+TXV	A*VC960603BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8327071
	CA*F3636*6D*+TXV	A*VC960803BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8327072
	CA*F3636*6D*+TXV	G*VM970603BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8332188
	CA*F3636*6D*+TXV	G*VM970803BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8332189
	CA*F3636*6D*+TXV	A*VM970603BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8332207
	CA*F3636*6D*+TXV	A*VM970803BNA*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	610	8332208
	CA*F3636*6D*+TXV	G*VC80604B*B*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8601425
	CA*F3636*6D*+TXV	A*VC80604B*B*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	620	8601566
	CA*F3636*6D*+TXV	G*VC80603B*B*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	600	9924258
	CA*F3636*6D*+TXV	G*VC80803B*B*	17,200	13,800	15.0	12.5	16,600	13,400	17,200	8.5	10,000	600	9924262
	CHPF3636B6C*+MBVC1200**-1A*+TXV		17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	600	8601435
	CHPF3636B6C*+TXV	G*VC960403BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601429
	CHPF3636B6C*+TXV	G*VC960603BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601430
	CHPF3636B6C*+TXV	G*VC960803BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601431
	CHPF3636B6C*+TXV	G*VM970603BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601432
	CHPF3636B6C*+TXV	G*VM970803BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601433
	CHPF3636B6C*+TXV	G*VC80604B*B*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	620	8601434
	CHPF3636B6C*+TXV	A*VC80604B*B*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	620	8601567
	CHPF3636B6C*+TXV	A*VC960403BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601568
	CHPF3636B6C*+TXV	A*VC960603BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601569
	CHPF3636B6C*+TXV	A*VC960803BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601570
	CHPF3636B6C*+TXV	A*VM970603BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601571
	CHPF3636B6C*+TXV	A*VM970803BNA*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	610	8601572
	CHPF3636B6C*+TXV	G*VC80603B*B*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	600	9924259
	CHPF3636B6C*+TXV	G*VC80803B*B*	17,400	14,000	15.0	12.5	16,800	13,600	17,400	8.5	10,000	600	9924263
CSCF3036N6D*+MBVC1200**-1A*+TXV		17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	600	8601442	
CSCF3036N6D*+TXV	G*VC960403BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601436	
CSCF3036N6D*+TXV	G*VC960603BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601437	
CSCF3036N6D*+TXV	G*VC960803BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601438	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER 1	EER 2	TOTAL	SENS.	Hi 4	HSPF 5	Low 6		
GSZ16 0181B* (Contd.)	CSCF3036N6D*+TXV	G*VM970603BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601439
	CSCF3036N6D*+TXV	G*VM970803BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601440
	CSCF3036N6D*+TXV	G*VC80604B*B*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	620	8601441
	CSCF3036N6D*+TXV	A*VC80604B*B*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	620	8601573
	CSCF3036N6D*+TXV	A*VC960403BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601574
	CSCF3036N6D*+TXV	A*VC960603BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601575
	CSCF3036N6D*+TXV	A*VC960803BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601576
	CSCF3036N6D*+TXV	A*VM970603BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601577
	CSCF3036N6D*+TXV	A*VM970803BNA*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	610	8601578
	CSCF3036N6D*+TXV	G*VC80603B*B*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	600	9924260
CSCF3036N6D*+TXV	G*VC80803B*B*	17,000	13,600	15.0	12.5	16,400	13,400	17,000	8.5	10,000	600	9924264	
GSZ16 0241B*	ACNF30XX16D*+TXV		22,400	17,800	14.0	11.5	21,600	17,400	22,800	8.2	14,000	800	8331274
	ACNF31XX16A*		22,400	17,800	14.0	12.0	21,600	17,400	22,200	8.2	14,300	730	8740464
	ACNF31XX16A*+TXV		23,000	18,400	14.5	12.2	22,200	18,000	22,800	8.5	14,500	730	8740465
	ARUF31B14A*+TXV		22,800	18,200	14.5	12.0	22,000	17,800	23,000	8.2	14,500	850	8331275
	ASPT37C14A*		24,000	19,200	16.0	13.0	23,200	18,800	24,000	9.5	14,500	875	8814283
	AVPTC25B14A*		23,000	18,400	15.0	12.5	22,200	18,000	23,800	8.5	14,000	850	8996200
	AVPTC29B14A*		24,000	19,200	16.0	13.0	23,200	18,800	24,000	9.0	14,500	795	8996201
	AWUF25XX16A*+TXV		21,200	16,800	14.0	11.5	20,400	16,400	22,000	8.2	13,500	700	8331272
	AWUF31XX16A*+TXV		22,800	18,200	15.0	12.5	22,000	17,800	23,000	8.5	14,000	845	8331273
	AWUF32XX16A*+TXV		22,800	18,200	15.0	12.5	22,000	17,800	22,000	8.5	14,000	845	9057922
	CA*F3137*6A*+EEP+TXV		22,400	17,800	14.0	11.5	21,600	17,400	23,200	8.2	14,000	800	9122267
	CA*F3137*6A*+MBR1200AA-1A*+TXV		23,000	18,400	14.5	12.0	22,200	18,000	23,600	8.2	14,000	800	8936393
	CA*F3137*6A*+TXV	G*VC960403BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	800	8327054
	CA*F3137*6A*+TXV	G*VC960603BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8327055
	CA*F3137*6A*+TXV	G*VC960803BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	810	8327056
	CA*F3137*6A*+TXV	A*VC960403BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	800	8327079
	CA*F3137*6A*+TXV	A*VC960603BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8327080
	CA*F3137*6A*+TXV	A*VC960803BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	810	8327081
	CA*F3137*6A*+TXV	G*VM970603BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8332194
	CA*F3137*6A*+TXV	G*VM970803BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	810	8332195
	CA*F3137*6A*+TXV	A*VM970603BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8332213
	CA*F3137*6A*+TXV	A*VM970803BNA*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	810	8332214
	CA*F3137*6A*+TXV	G*VC80604B*B*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8601445
	CA*F3137*6A*+TXV	A*VC80604B*B*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	815	8601579
	CA*F3137*6A*+TXV	G*VC80603B*B*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	750	9924265
	CA*F3137*6A*+TXV	G*VC80803B*B*	23,400	18,600	16.0	13.0	22,600	18,200	23,600	9.0	14,000	800	9924269
	CA*F3636*6D*+EEP+TXV		23,000	18,400	14.0	11.5	22,200	18,000	24,000	8.2	14,000	800	9134486
	CA*F3636*6D*+TXV	G*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	8327051
	CA*F3636*6D*+TXV	G*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8327052
	CA*F3636*6D*+TXV	G*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8327053
	CA*F3636*6D*+TXV	A*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	8327076
	CA*F3636*6D*+TXV	A*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8327077
	CA*F3636*6D*+TXV	A*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8327078
	CA*F3636*6D*+TXV	G*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8332192
CA*F3636*6D*+TXV	G*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8332193	
CA*F3636*6D*+TXV	A*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8332211	
CA*F3636*6D*+TXV	A*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8332212	
CA*F3636*6D*+TXV	G*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8601443	
CA*F3636*6D*+TXV	A*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8601580	
CA*F3636*6D*+TXV	G*VC80603B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	750	9924266	
CA*F3636*6D*+TXV	G*VC80803B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	9924270	
CA*F3636*6D*+TXV	G*VC80804C*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	9924273	
CHPF3636B6C*+MBVC1200**-1A*+TXV		23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	810	8601453	

See Notes on Page 31.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0241B* (Contd.)	CHPF3636B6C*+TXV	G*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	800	8601447
	CHPF3636B6C*+TXV	G*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	790	8601448
	CHPF3636B6C*+TXV	G*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	810	8601449
	CHPF3636B6C*+TXV	G*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	790	8601450
	CHPF3636B6C*+TXV	G*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	810	8601451
	CHPF3636B6C*+TXV	G*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	815	8601452
	CHPF3636B6C*+TXV	A*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	815	8601581
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	800	8601582
	CHPF3636B6C*+TXV	A*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	790	8601583
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	810	8601584
	CHPF3636B6C*+TXV	A*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	790	8601585
	CHPF3636B6C*+TXV	A*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	810	8601586
	CHPF3636B6C*+TXV	G*VC80603B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	750	9924267
	CHPF3636B6C*+TXV	G*VC80803B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,400	8.5	14,000	750	9924271
	CSCF3036N6D*+MBVC1200**-1A*+TXV		23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8601460
	CSCF3036N6D*+TXV	G*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	8601454
	CSCF3036N6D*+TXV	G*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	790	8601455
	CSCF3036N6D*+TXV	G*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8601456
	CSCF3036N6D*+TXV	G*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	790	8601457
	CSCF3036N6D*+TXV	G*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8601458
	CSCF3036N6D*+TXV	G*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8601459
	CSCF3036N6D*+TXV	A*VC80604B*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	815	8601587
	CSCF3036N6D*+TXV	A*VC960403BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	8601588
	CSCF3036N6D*+TXV	A*VC960603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	790	8601589
	CSCF3036N6D*+TXV	A*VC960803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8601590
	CSCF3036N6D*+TXV	A*VM970603BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	790	8601591
	CSCF3036N6D*+TXV	A*VM970803BNA*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	810	8601592
	CSCF3036N6D*+TXV	G*VC80603B*B*	23,000	18,400	14.5	12.2	22,200	18,000	23,000	8.2	14,000	750	9924268
CSCF3036N6D*+TXV	G*VC80803B*B*	23,000	18,400	14.5	12.2	22,200	18,000	23,000	8.2	14,000	800	9924272	
CSCF3036N6D*+TXV	G*VC80804C*B*	23,000	18,400	15.0	12.5	22,200	18,000	23,200	8.5	14,000	800	9924274	
GSZ16 0301B*	ACNF30XX16D*+TXV		27,600	22,000	14.0	11.5	26,600	21,600	28,000	8.2	15,200	870	8602896
	ARUF37C14A*+TXV		28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.2	15,200	990	8331280
	ASPT33C14A*		28,600	22,800	15.0	12.5	27,600	22,400	29,000	8.5	17,500	1,000	10207404
	AVPTC33C14A*		28,600	22,800	15.0	12.5	27,600	22,400	29,000	8.5	17,500	965	10207416
	AVPTC37B14A*		28,400	22,600	15.0	12.5	27,400	22,200	29,000	8.5	15,000	925	8996202
	AVPTC37C14A*		28,800	23,000	16.0	13.0	27,800	22,600	29,400	9.0	15,200	930	8996203
	AWUF31XX16A*+TXV		28,000	22,400	15.0	12.5	27,000	21,800	28,000	8.5	15,000	950	8331279
	AWUF32XX16A*+TXV		28,000	22,400	15.0	12.5	27,000	21,800	28,000	8.2	15,000	950	8484190
	CA*F3137*6A*+EEP+TXV		28,600	22,800	14.0	11.5	27,600	22,400	28,600	8.2	15,200	1,000	9122268
	CA*F3137*6A*+MBR1200AA-1A*+TXV		28,000	22,400	14.5	12.0	27,000	21,800	28,600	8.2	15,200	1,020	8936396
	CA*F3137*6A*+TXV	G*VC960403BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,000	8327059
	CA*F3137*6A*+TXV	G*VC960603BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,005	8327060
	CA*F3137*6A*+TXV	G*VC960803BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,020	8327061
	CA*F3137*6A*+TXV	A*VC960403BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,000	8327084
	CA*F3137*6A*+TXV	A*VC960603BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,005	8327085
	CA*F3137*6A*+TXV	A*VC960803BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,020	8327086
	CA*F3137*6A*+TXV	G*VM970603BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,005	8332198
	CA*F3137*6A*+TXV	G*VM970803BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,020	8332199
	CA*F3137*6A*+TXV	A*VM970603BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,005	8332217
	CA*F3137*6A*+TXV	A*VM970803BNA*	28,800	23,000	15.0	12.5	27,800	22,600	29,000	8.5	15,200	1,020	8332218
	CA*F3137*6A*+TXV	G*VC80604B*B*	28,600	22,800	15.0	12.5	27,600	22,400	28,600	8.5	15,200	1,000	8601464
	CA*F3137*6A*+TXV	A*VC80604B*B*	28,600	22,800	15.0	12.5	27,600	22,400	28,600	8.5	15,200	1,000	8601593
CA*F3137*6A*+TXV	G*VC80603B*B*	28,600	22,800	15.0	12.5	27,600	22,400	28,600	8.5	15,200	1,000	9924275	
CA*F3137*6A*+TXV	G*VC80803B*B*	28,600	22,800	15.0	12.5	27,600	22,400	28,600	8.5	15,200	950	9924280	

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0301B* (Contd.)	CA*F3636*6D*+MBVC1600**-1A*+TXV		28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,010	8601463
	CA*F3636*6D*+TXV	G*VC960803BNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	1,020	8327057
	CA*F3636*6D*+TXV	G*VC960804CNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	990	8327058
	CA*F3636*6D*+TXV	A*VC960803BNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	1,020	8327082
	CA*F3636*6D*+TXV	A*VC960804CNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	990	8327083
	CA*F3636*6D*+TXV	G*VM970803BNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	1,020	8332196
	CA*F3636*6D*+TXV	G*VM970804CNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	990	8332197
	CA*F3636*6D*+TXV	A*VM970803BNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	1,020	8332215
	CA*F3636*6D*+TXV	A*VM970804CNA*	28,400	22,600	14.5	12.0	27,400	22,200	28,800	8.5	15,200	990	8332216
	CA*F3636*6D*+TXV	G*VC80604B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	8601461
	CA*F3636*6D*+TXV	G*VC80805C*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	990	8601462
	CA*F3636*6D*+TXV	A*VC80604B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	8601594
	CA*F3636*6D*+TXV	A*VC80805C*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	990	8601595
	CA*F3636*6D*+TXV	G*VC80603B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	9924276
	CA*F3636*6D*+TXV	G*VC80803B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	950	9924281
	CA*F3636*6D*+TXV	G*VC80804C*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,050	9924285
	CA*F3636*6D*+TXV	G*VC80805D*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	9924288
	CA*F3743*6D*+TXV	G*VC960804CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	990	8327062
	CA*F3743*6D*+TXV	G*VC961005CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	1,020	8327063
	CA*F3743*6D*+TXV	A*VC960804CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	990	8327087
	CA*F3743*6D*+TXV	A*VC961005CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	1,020	8327088
	CA*F3743*6D*+TXV	G*VM970804CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	990	8332200
	CA*F3743*6D*+TXV	G*VM971005CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	1,020	8332201
	CA*F3743*6D*+TXV	A*VM970804CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	990	8332219
	CA*F3743*6D*+TXV	A*VM971005CNA*	29,200	23,400	16.0	13.0	28,200	22,800	29,200	9.0	15,200	1,020	8332220
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,600	22,800	16.0	13.0	27,600	22,400	28,600	9.0	15,200	990	8601465
	CA*F3743*6D*+TXV	A*VC80805C*B*	28,600	22,800	16.0	13.0	27,600	22,400	28,600	9.0	15,200	990	8601596
	CA*F3743*6D*+TXV	G*VC80805D*B*	28,600	22,800	16.0	13.0	27,600	22,400	28,600	9.0	15,200	1,000	9924289
	CA*F4961*6D*+EEP+TXV		29,000	23,200	14.0	12.0	28,000	22,600	29,200	8.5	18,400	1,000	9084880
	CAPT3743*4A*	G*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601467
	CAPT3743*4A*	G*VC961005CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601468
	CAPT3743*4A*	G*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601469
	CAPT3743*4A*	G*VM971005CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601470
	CAPT3743*4A*	G*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601471
	CAPT3743*4A*	A*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601597
	CAPT3743*4A*	A*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601598
	CAPT3743*4A*	A*VC961005CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601599
	CAPT3743*4A*	A*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601600
	CAPT3743*4A*	A*VM971005CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601601
	CAPT3743*4A*	G*VC80805D*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,000	9924290
	CAPT3743*4A*+MBVC1600**-1A*		28,400	22,600	15.5	12.5	27,400	22,200	28,600	8.5	15,200	1,010	8602897
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,020	8601472
CHPF3636B6C*+TXV	G*VM970803BNA*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,020	8601473	
CHPF3636B6C*+TXV	G*VC80604B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	8601474	
CHPF3636B6C*+TXV	A*VC80604B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	8601602	
CHPF3636B6C*+TXV	A*VC960803BNA*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,020	8601603	
CHPF3636B6C*+TXV	A*VM970803BNA*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,020	8601604	
CHPF3636B6C*+TXV	G*VC80603B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	1,000	9924277	
CHPF3636B6C*+TXV	G*VC80803B*B*	28,000	22,400	14.5	12.0	27,000	21,800	28,000	8.5	15,200	950	9924282	
CHPF3743C6B*+EEP+TXV		27,800	22,200	14.0	12.0	26,800	21,600	28,000	8.2	15,200	1,000	9045601	
CHPF3743C6B*+MBVC1600**-1A*+TXV		28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,010	8601481	
CHPF3743C6B*+TXV	G*VC960803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,020	8601475	
CHPF3743C6B*+TXV	G*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601476	
CHPF3743C6B*+TXV	G*VM970803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,020	8601477	

See Notes on Page 31.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0301B* (Contd.)	CHPF3743C6B*+TXV	G*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601478
	CHPF3743C6B*+TXV	G*VC80604B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,000	8601479
	CHPF3743C6B*+TXV	G*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601480
	CHPF3743C6B*+TXV	A*VC80604B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,000	8601605
	CHPF3743C6B*+TXV	A*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601606
	CHPF3743C6B*+TXV	A*VC960803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,020	8601607
	CHPF3743C6B*+TXV	A*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601608
	CHPF3743C6B*+TXV	A*VM970803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,020	8601609
	CHPF3743C6B*+TXV	A*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	990	8601610
	CHPF3743C6B*+TXV	G*VC80603B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,000	9924278
	CHPF3743C6B*+TXV	G*VC80803B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	950	9924283
	CHPF3743C6B*+TXV	G*VC80804C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,000	9924286
	CHPF3743C6B*+TXV	G*VC80805D*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,200	8.5	15,200	1,000	9924291
	CSCF3642N6D*+EEP+TXV		27,800	22,200	14.0	11.5	26,800	21,600	28,000	8.2	15,200	1,000	9045600
	CSCF3642N6D*+MBVC1600**-1A*+TXV		28,400	22,600	15.5	12.5	27,400	22,200	28,600	8.5	15,200	1,010	8601488
	CSCF3642N6D*+TXV	G*VC960803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601482
	CSCF3642N6D*+TXV	G*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601483
	CSCF3642N6D*+TXV	G*VM970803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601484
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601485
	CSCF3642N6D*+TXV	G*VC80604B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,000	8601486
	CSCF3642N6D*+TXV	G*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601487
	CSCF3642N6D*+TXV	A*VC80604B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,000	8601611
	CSCF3642N6D*+TXV	A*VC80805C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601612
	CSCF3642N6D*+TXV	A*VC960803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601613
	CSCF3642N6D*+TXV	A*VC960804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601614
	CSCF3642N6D*+TXV	A*VM970803BNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,020	8601615
	CSCF3642N6D*+TXV	A*VM970804CNA*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	990	8601616
	CSCF3642N6D*+TXV	G*VC80603B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,000	9924279
CSCF3642N6D*+TXV	G*VC80803B*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	950	9924284	
CSCF3642N6D*+TXV	G*VC80804C*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,050	9924287	
CSCF3642N6D*+TXV	G*VC80805D*B*	28,400	22,600	15.0	12.5	27,400	22,200	28,600	8.5	15,200	1,000	9924292	
GSZ16 0361B*	ARUF37D14A*+TXV		33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.2	22,000	1,040	8331285
	ASPT39C14A*		32,600	25,400	15.0	12.5	31,400	24,800	34,200	8.2	20,400	1,220	10207405
	AVPTC37B14A*		33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	20,000	1,080	8996204
	AVPTC37C14A*		34,200	26,600	16.0	13.0	33,000	26,000	35,000	9.0	21,000	1,130	8996205
	AVPTC39C14A*		32,600	25,400	15.0	12.5	31,400	24,800	34,200	8.2	20,400	1,120	10207417
	AWUF37XX16B*+TXV		32,400	25,200	14.0	11.5	31,200	24,600	33,400	8.2	19,600	1,100	8331284
	CA*F3137*6A*+TXV	G*VC960403BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,080	8327064
	CA*F3137*6A*+TXV	G*VC960603BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,070	8327065
	CA*F3137*6A*+TXV	G*VC960803BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,100	8327066
	CA*F3137*6A*+TXV	A*VC960403BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,080	8327089
	CA*F3137*6A*+TXV	A*VC960603BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,070	8327090
	CA*F3137*6A*+TXV	A*VC960803BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,100	8327091
	CA*F3137*6A*+TXV	G*VM970603BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,070	8332202
	CA*F3137*6A*+TXV	G*VM970803BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,100	8332203
	CA*F3137*6A*+TXV	A*VM970603BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,070	8332221
	CA*F3137*6A*+TXV	A*VM970803BNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,600	8.5	21,000	1,100	8332222
	CA*F3137*6A*+TXV	G*VC80604B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,000	1,095	8601490
	CA*F3137*6A*+TXV	A*VC80604B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,000	1,095	8601617
	CA*F3137*6A*+TXV	G*VC80603B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,000	1,100	9924293
	CA*F3137*6A*+TXV	G*VC80803B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,000	1,050	9924297
	CA*F3743*6D*+EEP+TXV		32,600	25,400	14.0	11.5	31,400	24,800	35,000	8.2	19,600	1,090	9101389
CA*F3743*6D*+TXV	G*VC960804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,080	8601491	
CA*F3743*6D*+TXV	G*VM970804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,080	8601492	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0361B* (Contd.)	CA*F3743*6D*+TXV	G*VC80604B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,095	8601493
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,075	8601494
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,095	8601618
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,075	8601619
	CA*F3743*6D*+TXV	A*VC960804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,080	8601620
	CA*F3743*6D*+TXV	A*VM970804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,080	8601621
	CA*F3743*6D*+TXV	G*VC80804C*B*	33,400	26,000	16.0	12.5	32,200	25,400	34,000	8.5	21,600	1,150	9924301
	CA*F3743*6D*+TXV	G*VC80805D*B*	33,400	26,000	15.0	12.5	32,200	25,400	34,000	8.5	21,600	1,100	9924305
	CA*F4961*6D*+MBR1600AA-1A*+TXV		33,400	26,000	14.5	12.0	32,200	25,400	34,000	8.2	22,000	1,030	8936394
	CA*F4961*6D*+MBVC2000**-1A*+TXV		34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.5	19,000	1,080	9007185
	CA*F4961*6D*+TXV	G*VC960804CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8327067
	CA*F4961*6D*+TXV	G*VC961005CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8327068
	CA*F4961*6D*+TXV	A*VC960804CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8327092
	CA*F4961*6D*+TXV	A*VC961005CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8327093
	CA*F4961*6D*+TXV	G*VM970804CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8332204
	CA*F4961*6D*+TXV	G*VM971005CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8332205
	CA*F4961*6D*+TXV	A*VM970804CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8332223
	CA*F4961*6D*+TXV	A*VM971005CNA*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8332224
	CA*F4961*6D*+TXV	G*VC80805C*B*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8601501
	CA*F4961*6D*+TXV	G*VC81005C*B*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8601502
	CA*F4961*6D*+TXV	A*VC80805C*B*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,090	8601622
	CA*F4961*6D*+TXV	A*VC81005C*B*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,110	8601623
	CA*F4961*6D*+TXV	G*VC80805D*B*	34,000	26,400	16.0	13.0	32,800	25,800	35,000	9.0	22,000	1,100	9924306
	CAPT3743*4A*	G*VC960804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,080	8601496
	CAPT3743*4A*	G*VM970804CNA*	30,000	23,400	14.5	12.0	29,000	22,800	34,000	8.5	21,600	1,080	8601497
	CAPT3743*4A*	G*VC80604B*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,095	8601498
	CAPT3743*4A*	G*VC80805C*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,075	8601499
	CAPT3743*4A*	A*VC80604B*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,095	8601624
	CAPT3743*4A*	A*VC80805C*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,075	8601625
	CAPT3743*4A*	A*VC960804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,080	8601626
	CAPT3743*4A*	A*VM970804CNA*	30,000	23,400	14.5	12.0	29,000	22,800	34,000	8.5	21,600	1,080	8601627
	CAPT3743*4A*	G*VC80804C*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,150	9924302
	CAPT3743*4A*	G*VC80805D*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,100	9924307
	CAPT3743*4A*+MBVC1600**-1A*		33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,600	1,080	8601500
	CAPT3743*4A*+MBVC2000**-1A*		32,800	25,400	16.0	13.0	31,600	24,800	34,000	9.5	22,200	1,170	9084879
	CAPT4961*4A*	G*VC960804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,090	8601504
	CAPT4961*4A*	G*VC961005CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,110	8601505
	CAPT4961*4A*	G*VM970804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,090	8601506
	CAPT4961*4A*	G*VM971005CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,110	8601507
	CAPT4961*4A*	A*VC960804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,090	8601628
	CAPT4961*4A*	A*VC961005CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,110	8601629
	CAPT4961*4A*	A*VM970804CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,090	8601630
	CAPT4961*4A*	A*VM971005CNA*	33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,110	8601631
	CAPT4961*4A*+MBVC1600**-1A*		33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	22,000	1,080	8601508
	CHPF3636B6C*+TXV	G*VC960803BNA*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,100	8601509
	CHPF3636B6C*+TXV	G*VM970803BNA*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,100	8601510
	CHPF3636B6C*+TXV	G*VC80604B*B*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,095	8601511
	CHPF3636B6C*+TXV	A*VC80604B*B*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,095	8601632
	CHPF3636B6C*+TXV	A*VC960803BNA*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,100	8601633
	CHPF3636B6C*+TXV	A*VM970803BNA*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,100	8601634
CHPF3636B6C*+TXV	G*VC80603B*B*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,100	9924294	
CHPF3636B6C*+TXV	G*VC80803B*B*	32,000	24,800	14.5	12.0	30,800	24,200	34,200	8.5	21,000	1,050	9924298	
CHPF3743C6B*+MBVC1600**-1A*+TXV		33,400	26,000	15.0	12.5	32,200	25,400	34,400	8.5	21,400	1,080	8601518	
CHPF3743C6B*+TXV	G*VC960803BNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,100	8601512	

See Notes on Page 31.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0361B* (Contd.)	CHPF3743C6B*+TXV	G*VC960804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,080	8601513
	CHPF3743C6B*+TXV	G*VM970803BNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,100	8601514
	CHPF3743C6B*+TXV	G*VM970804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,080	8601515
	CHPF3743C6B*+TXV	G*VC80604B*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,095	8601516
	CHPF3743C6B*+TXV	G*VC80805C*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,400	1,075	8601517
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,095	8601635
	CHPF3743C6B*+TXV	A*VC80805C*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,400	1,075	8601636
	CHPF3743C6B*+TXV	A*VC960803BNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,100	8601637
	CHPF3743C6B*+TXV	A*VC960804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,080	8601638
	CHPF3743C6B*+TXV	A*VM970803BNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,100	8601639
	CHPF3743C6B*+TXV	A*VM970804CNA*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,080	8601640
	CHPF3743C6B*+TXV	G*VC80603B*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,400	1,100	9924295
	CHPF3743C6B*+TXV	G*VC80803B*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,400	1,050	9924299
	CHPF3743C6B*+TXV	G*VC80804C*B*	33,000	25,600	14.5	12.0	31,800	25,000	34,000	8.5	21,400	1,100	9924303
	CHPF3743C6B*+TXV	G*VC80805D*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,400	1,200	9924308
	CHPF3743D6B*+MBVC2000**-1A*+TXV		33,400	26,000	16.0	13.0	32,200	25,400	34,400	9.0	18,000	1,080	9007184
	CSCF3642N6D*+MBVC1600**-1A*+TXV		33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,080	8601525
	CSCF3642N6D*+TXV	G*VC960803BNA*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,100	8601519
	CSCF3642N6D*+TXV	G*VC960804CNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,080	8601520
	CSCF3642N6D*+TXV	G*VM970803BNA*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,100	8601521
	CSCF3642N6D*+TXV	G*VM970804CNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,080	8601522
	CSCF3642N6D*+TXV	G*VC80604B*B*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,095	8601523
	CSCF3642N6D*+TXV	G*VC80805C*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,075	8601524
	CSCF3642N6D*+TXV	A*VC80604B*B*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,095	8601641
	CSCF3642N6D*+TXV	A*VC80805C*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,075	8601642
	CSCF3642N6D*+TXV	A*VC960803BNA*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,100	8601643
	CSCF3642N6D*+TXV	A*VC960804CNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,080	8601644
	CSCF3642N6D*+TXV	A*VM970803BNA*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,100	8601645
	CSCF3642N6D*+TXV	A*VM970804CNA*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,080	8601646
	CSCF3642N6D*+TXV	G*VC80603B*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,100	9924296
CSCF3642N6D*+TXV	G*VC80803B*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,050	9924300	
CSCF3642N6D*+TXV	G*VC80804C*B*	32,800	25,400	14.5	12.0	31,600	24,800	34,600	8.5	21,600	1,150	9924304	
CSCF3642N6D*+TXV	G*VC80805D*B*	33,000	25,600	15.0	12.5	31,800	25,000	34,000	8.5	21,600	1,100	9924309	
GSZ16 0421B*	ARUF47D14A*+TXV		38,500	29,000	14.5	12.0	37,200	28,400	40,000	8.5	25,600	1,200	8331289
	ASPT49C14A*		38,500	29,000	14.5	12.2	37,200	28,400	39,500	8.2	25,200	1,200	10207406
	AVPTC49C14A*		38,500	29,000	14.5	12.2	37,200	28,400	39,500	8.2	25,200	1,200	10207418
	AVPTC49D14A*		39,000	29,400	15.5	13.0	37,600	28,800	40,000	9.0	25,000	1,310	8996207
	AVPTC59C14A*		38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	24,000	1,250	8996206
	CA*F3743*6D*+EEP+TXV		38,000	28,600	14.0	11.5	36,600	28,000	39,000	8.2	25,600	1,200	9101390
	CA*F3743*6D*+TXV	G*VC960804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602899
	CA*F3743*6D*+TXV	G*VC961005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602900
	CA*F3743*6D*+TXV	G*VM970804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602901
	CA*F3743*6D*+TXV	G*VM971005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602902
	CA*F3743*6D*+TXV	G*VC80805C*B*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,190	8602903
	CA*F3743*6D*+TXV	G*VC81005C*B*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,170	8602904
	CA*F3743*6D*+TXV	A*VC80805C*B*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,190	8602933
	CA*F3743*6D*+TXV	A*VC81005C*B*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,170	8602934
	CA*F3743*6D*+TXV	A*VC960804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602935
	CA*F3743*6D*+TXV	A*VC961005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602936
	CA*F3743*6D*+TXV	A*VM970804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602937
	CA*F3743*6D*+TXV	A*VM971005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602938
	CA*F3743*6D*+TXV	G*VC80805D*B*	38,500	29,000	15.0	12.5	37,200	28,400	40,500	8.5	25,600	1,350	9924310
	CA*F4860*6D*+EEP+TXV		39,000	29,400	14.0	11.5	37,600	28,800	39,000	8.2	25,600	1,200	9101391
CA*F4961*6D*+EEP+TXV		39,000	29,400	14.0	12.0	37,600	28,800	39,000	8.5	23,000	1,250	9084881	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0421B* (Contd.)	CA*F4961*6D*+MBR1600AA-1A*+TXV		39,500	29,800	14.5	12.0	38,000	29,000	40,000	8.5	25,400	1,275	8936397
	CA*F4961*6D*+TXV	G*VC960804CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8327096
	CA*F4961*6D*+TXV	G*VC961005CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8327097
	CA*F4961*6D*+TXV	A*VC960804CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8327098
	CA*F4961*6D*+TXV	A*VC961005CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8327099
	CA*F4961*6D*+TXV	G*VM970804CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8332226
	CA*F4961*6D*+TXV	G*VM971005CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8332227
	CA*F4961*6D*+TXV	A*VM970804CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8332228
	CA*F4961*6D*+TXV	A*VM971005CNA*	39,500	29,800	16.0	13.0	38,000	29,000	40,500	9.0	25,600	1,165	8332229
	CAPT3743*4A*	G*VC960804CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602905
	CAPT3743*4A*	G*VC961005CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602906
	CAPT3743*4A*	G*VM970804CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602907
	CAPT3743*4A*	G*VM971005CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602908
	CAPT3743*4A*	G*VC80805C*B*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,190	8602909
	CAPT3743*4A*	G*VC81005C*B*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,170	8602910
	CAPT3743*4A*	A*VC80805C*B*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,190	8602939
	CAPT3743*4A*	A*VC81005C*B*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,170	8602940
	CAPT3743*4A*	A*VC960804CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602941
	CAPT3743*4A*	A*VC961005CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602942
	CAPT3743*4A*	A*VM970804CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,185	8602943
	CAPT3743*4A*	A*VM971005CNA*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,180	8602944
	CAPT3743*4A*	G*VC80805D*B*	38,500	29,000	14.5	12.5	37,200	28,400	40,500	8.5	25,600	1,350	9924311
	CAPT4961*4A*	G*VC960804CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602911
	CAPT4961*4A*	G*VC961005CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602912
	CAPT4961*4A*	G*VM970804CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602913
	CAPT4961*4A*	G*VM971005CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602914
	CAPT4961*4A*	A*VC960804CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602945
	CAPT4961*4A*	A*VC961005CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602946
	CAPT4961*4A*	A*VM970804CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602947
	CAPT4961*4A*	A*VM971005CNA*	39,500	29,800	15.0	12.5	38,000	29,000	40,000	8.5	25,600	1,165	8602948
	CAPT4961*4A*+MBVC2000**-1A*		41,000	30,800	15.5	13.0	39,600	30,200	39,000	9.0	25,000	1,500	8601527
	CHPF3743C6B*+TXV	G*VC960804CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,185	8602921
	CHPF3743C6B*+TXV	G*VC961005CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,180	8602922
	CHPF3743C6B*+TXV	G*VM970804CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,185	8602923
	CHPF3743C6B*+TXV	G*VM971005CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,180	8602924
	CHPF3743C6B*+TXV	G*VC80805C*B*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,190	8602925
	CHPF3743C6B*+TXV	G*VC81005C*B*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,170	8602926
	CHPF3743C6B*+TXV	A*VC80805C*B*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,190	8602949
	CHPF3743C6B*+TXV	A*VC81005C*B*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,170	8602950
	CHPF3743C6B*+TXV	A*VC960804CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,185	8602951
	CHPF3743C6B*+TXV	A*VC961005CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,180	8602952
	CHPF3743C6B*+TXV	A*VM970804CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,185	8602953
	CHPF3743C6B*+TXV	A*VM971005CNA*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,180	8602954
	CHPF3743C6B*+TXV	G*VC80805D*B*	38,500	29,000	14.5	12.0	37,200	28,400	39,500	8.5	25,600	1,300	9924312
	CHPF3743D6B*+MBVC2000**-1A*+TXV		38,500	29,000	15.5	12.5	37,200	28,400	39,500	8.5	25,000	1,170	8601528
	CHPF3743D6B*+TXV	G*VC960804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,185	8602915
	CHPF3743D6B*+TXV	G*VC961005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,180	8602916
	CHPF3743D6B*+TXV	G*VM970804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,185	8602917
	CHPF3743D6B*+TXV	G*VM971005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,180	8602918
	CHPF3743D6B*+TXV	G*VC80805C*B*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,190	8602919
CHPF3743D6B*+TXV	G*VC81005C*B*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,170	8602920	
CHPF3743D6B*+TXV	A*VC80805C*B*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,190	8602955	
CHPF3743D6B*+TXV	A*VC81005C*B*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,170	8602956	
CHPF3743D6B*+TXV	A*VC960804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,185	8602957	

See Notes on Page 31.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0421B* (Contd.)	CHPF3743D6B*+TXV	A*VC961005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,180	8602958
	CHPF3743D6B*+TXV	A*VM970804CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,185	8602959
	CHPF3743D6B*+TXV	A*VM971005CNA*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,180	8602960
	CHPF3743D6B*+TXV	G*VC80805D*B*	38,500	29,000	15.0	12.5	37,200	28,400	39,500	8.5	25,600	1,350	9924313
	CHPF4860D6D*+MBVC2000**-1A*+TXV		38,500	29,000	16.0	13.0	37,200	28,400	39,500	9.0	25,000	1,170	8601529
	CSCF3642N6D*+MBVC2000**-1A*+TXV		38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,000	1,170	8601530
	CSCF3642N6D*+TXV	G*VC960804CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,185	8602927
	CSCF3642N6D*+TXV	G*VC961005CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,180	8602928
	CSCF3642N6D*+TXV	G*VM970804CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,185	8602929
	CSCF3642N6D*+TXV	G*VM971005CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,180	8602930
	CSCF3642N6D*+TXV	G*VC80805C*B*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,190	8602931
	CSCF3642N6D*+TXV	G*VC81005C*B*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,170	8602932
	CSCF3642N6D*+TXV	A*VC80805C*B*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,190	8602961
	CSCF3642N6D*+TXV	A*VC81005C*B*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,170	8602962
	CSCF3642N6D*+TXV	A*VC960804CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,185	8602963
	CSCF3642N6D*+TXV	A*VC961005CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,180	8602964
	CSCF3642N6D*+TXV	A*VM970804CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,185	8602965
	CSCF3642N6D*+TXV	A*VM971005CNA*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,180	8602966
CSCF3642N6D*+TXV	G*VC80805D*B*	38,000	28,600	15.0	12.0	36,600	28,000	40,500	8.5	25,600	1,350	9924314	
GSZ16 0481B*	ARUF61D14A*+TXV		44,000	33,800	14.5	12.0	42,400	33,000	47,000	8.5	25,600	1,400	8331293
	ASPT47D14A*		45,000	34,400	15.0	12.5	43,400	33,600	45,000	8.5	24,000	1,425	9057590
	ASPT49C14A*		44,000	33,800	14.5	12.5	42,400	33,000	46,500	8.5	25,000	1,395	10207407
	ASPT61D14A*		45,500	34,800	16.0	13.0	43,800	34,000	47,000	9.0	25,800	1,400	8693537
	AVPTC49C14A*		44,000	33,800	14.5	12.5	42,400	33,000	46,500	8.5	25,000	1,420	10207419
	AVPTC59C14A*		44,500	34,000	15.0	12.5	42,800	33,200	46,500	8.5	25,000	1,485	8996208
	AVPTC61D14A*		45,500	34,800	16.0	13.0	43,800	34,000	46,000	9.5	25,000	1,455	8996209
	CA*F4860*6D*+EEP+TXV		45,000	34,400	14.5	12.0	43,400	33,600	46,000	8.5	26,000	1,400	9134487
	CA*F4961*6D*+MBR1600AA-1A*+TXV		44,000	33,800	14.5	12.0	42,400	33,000	47,000	8.5	26,000	1,475	8936395
	CA*F4961*6D*+TXV	G*VC961205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	9.0	26,000	1,430	8327069
	CA*F4961*6D*+TXV	A*VC961205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	9.0	26,000	1,430	8327094
	CA*F4961*6D*+TXV	G*VM971205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	9.0	26,000	1,430	8332206
	CA*F4961*6D*+TXV	A*VM971205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	9.0	26,000	1,430	8332225
	CA*F4961*6D*+TXV	G*VC960804CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601531
	CA*F4961*6D*+TXV	G*VC961005CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,430	8601532
	CA*F4961*6D*+TXV	G*VM970804CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601533
	CA*F4961*6D*+TXV	G*VM971005CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,430	8601534
	CA*F4961*6D*+TXV	G*VC80805C*B*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,400	8601535
	CA*F4961*6D*+TXV	G*VC81005C*B*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601536
	CA*F4961*6D*+TXV	A*VC80805C*B*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,400	8601647
	CA*F4961*6D*+TXV	A*VC81005C*B*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601648
	CA*F4961*6D*+TXV	A*VC960804CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601649
	CA*F4961*6D*+TXV	A*VC961005CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,430	8601650
	CA*F4961*6D*+TXV	A*VM970804CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,380	8601651
	CA*F4961*6D*+TXV	A*VM971005CNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,430	8601652
	CA*F4961*6D*+TXV	G*VC80805D*B*	44,500	34,000	15.0	12.5	42,800	33,200	47,500	8.5	26,000	1,500	9924315
	CAPT4961*4A*	G*VC960804CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601538
	CAPT4961*4A*	G*VC961005CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,430	8601539
	CAPT4961*4A*	G*VC961205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,000	9.0	26,000	1,430	8601540
	CAPT4961*4A*	G*VM970804CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601541
	CAPT4961*4A*	G*VM971005CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,430	8601542
	CAPT4961*4A*	G*VM971205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,000	9.0	26,000	1,430	8601543
CAPT4961*4A*	G*VC80805C*B*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,400	8601544	
CAPT4961*4A*	G*VC81005C*B*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601545	
CAPT4961*4A*	A*VC80805C*B*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,400	8601653	

See Notes on Page 31.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0481B* (Contd.)	CAPT4961*4A*	A*VC81005C*B*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601654
	CAPT4961*4A*	A*VC960804CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601655
	CAPT4961*4A*	A*VC961005CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,430	8601656
	CAPT4961*4A*	A*VC961205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,000	9.0	26,000	1,430	8601657
	CAPT4961*4A*	A*VM970804CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,380	8601658
	CAPT4961*4A*	A*VM971005CNA*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,430	8601659
	CAPT4961*4A*	A*VM971205DNA*	44,500	34,000	15.0	12.5	42,800	33,200	47,000	9.0	26,000	1,430	8601660
	CAPT4961*4A*	G*VC80805D*B*	44,500	34,000	14.5	12.0	42,800	33,200	47,000	8.5	26,000	1,500	9924316
	CAPT4961*4A*+MBVC2000**-1A*		45,500	34,800	15.5	12.5	43,800	34,000	47,500	9.0	26,000	1,570	8601546
	CHPF4860D6D*+TXV		44,500	34,000	15.5	12.5	42,800	33,200	47,500	9.0	25,800	1,570	8601555
	CHPF4860D6D*+TXV	G*VC960804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601547
	CHPF4860D6D*+TXV	G*VC961005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601548
	CHPF4860D6D*+TXV	G*VC961205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601549
	CHPF4860D6D*+TXV	G*VM970804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601550
	CHPF4860D6D*+TXV	G*VM971005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601551
	CHPF4860D6D*+TXV	G*VM971205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601552
	CHPF4860D6D*+TXV	G*VC80805C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,400	8601553
	CHPF4860D6D*+TXV	G*VC81005C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601554
	CHPF4860D6D*+TXV	A*VC80805C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,400	8601661
	CHPF4860D6D*+TXV	A*VC81005C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601662
	CHPF4860D6D*+TXV	A*VC960804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601663
	CHPF4860D6D*+TXV	A*VC961005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601664
	CHPF4860D6D*+TXV	A*VC961205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601665
	CHPF4860D6D*+TXV	A*VM970804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601666
	CHPF4860D6D*+TXV	A*VM971005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601667
	CHPF4860D6D*+TXV	A*VM971205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601668
	CHPF4860D6D*+TXV	G*VC80805D*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,500	9924317
	CSCF4860N6D*+MBVC2000**-1A*+TXV		44,500	34,000	15.5	12.5	42,800	33,200	47,500	9.0	25,800	1,570	8601564
	CSCF4860N6D*+TXV	G*VC960804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601556
	CSCF4860N6D*+TXV	G*VC961005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601557
	CSCF4860N6D*+TXV	G*VC961205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601558
	CSCF4860N6D*+TXV	G*VM970804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601559
	CSCF4860N6D*+TXV	G*VM971005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601560
	CSCF4860N6D*+TXV	G*VM971205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601561
	CSCF4860N6D*+TXV	G*VC80805C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,400	8601562
	CSCF4860N6D*+TXV	G*VC81005C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601563
	CSCF4860N6D*+TXV	A*VC80805C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,400	8601669
	CSCF4860N6D*+TXV	A*VC81005C*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601670
	CSCF4860N6D*+TXV	A*VC960804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601671
	CSCF4860N6D*+TXV	A*VC961005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601672
CSCF4860N6D*+TXV	A*VC961205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601673	
CSCF4860N6D*+TXV	A*VM970804CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,380	8601674	
CSCF4860N6D*+TXV	A*VM971005CNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601675	
CSCF4860N6D*+TXV	A*VM971205DNA*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,430	8601676	
CSCF4860N6D*+TXV	G*VC80805D*B*	44,000	33,800	15.0	12.5	42,400	33,000	47,000	8.5	25,800	1,500	9924318	
GSZ16 0601B*	AVPTC60D14A*		54,000	42,800	15.5	11.5	52,000	41,800	58,500	9.5	37,000	1,810	8560970
	AVPTC61D14A*		55,000	43,600	16.0	12.5	53,000	42,600	60,000	9.5	32,000	1,810	8996210
	CA*F4961*6D*+TXV	G*VC961005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560971
	CA*F4961*6D*+TXV	G*VM971005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560973
	CA*F4961*6D*+TXV	A*VC961005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560975
	CA*F4961*6D*+TXV	A*VM971005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560977
	CA*F4961*6D*+TXV	G*VC961205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560980
	CA*F4961*6D*+TXV	G*VM971205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560982
	CA*F4961*6D*+TXV	A*VC961205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560984

See Notes on Page 31.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
GSZ16 0601B* (Contd.)	CA*F4961*6D*+TXV	A*VM971205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560986
	CA*F4961*6D*+TXV	G*VC80805C*B*	54,000	42,800	15.0	11.3	52,000	41,800	60,000	9.0	34,000	1,820	8738083
	CA*F4961*6D*+TXV	G*VC81005C*B*	54,000	42,800	15.0	11.3	52,000	41,800	60,000	9.0	34,000	1,790	8738084
	CA*F4961*6D*+TXV	A*VC80805C*B*	54,000	42,800	15.0	11.3	52,000	41,800	60,000	9.0	34,000	1,820	8738099
	CA*F4961*6D*+TXV	A*VC81005C*B*	54,000	42,800	15.0	11.3	52,000	41,800	60,000	9.0	34,000	1,790	8738100
	CA*F4961*6D*+TXV	G*VC80805D*B*	54,000	42,800	15.0	11.3	52,000	41,800	60,000	9.0	34,000	1,650	9924319
	CAPT4961*4A*	G*VC961005CNA*	54,000	42,800	14.5	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560972
	CAPT4961*4A*	G*VM971005CNA*	54,000	42,800	14.5	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560974
	CAPT4961*4A*	A*VC961005CNA*	54,000	42,800	14.5	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560976
	CAPT4961*4A*	A*VM971005CNA*	54,000	42,800	14.5	11.5	52,000	41,800	58,000	8.5	37,000	1,750	8560978
	CAPT4961*4A*	G*VC961205DNA*	54,500	43,200	15.0	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560981
	CAPT4961*4A*	G*VM971205DNA*	54,500	43,200	15.0	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560983
	CAPT4961*4A*	A*VC961205DNA*	54,500	43,200	15.0	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560985
	CAPT4961*4A*	A*VM971205DNA*	54,500	43,200	15.0	11.5	52,600	42,200	58,500	8.5	37,000	1,885	8560987
	CAPT4961*4A*	G*VC80805C*B*	54,000	42,800	14.5	11.3	52,000	41,800	60,000	9.0	34,000	1,820	8738085
	CAPT4961*4A*	G*VC81005C*B*	54,000	42,800	14.5	11.3	52,000	41,800	60,000	9.0	34,000	1,790	8738086
	CAPT4961*4A*	A*VC80805C*B*	54,000	42,800	14.5	11.3	52,000	41,800	60,000	9.0	34,000	1,820	8738101
	CAPT4961*4A*	A*VC81005C*B*	54,000	42,800	14.5	11.3	52,000	41,800	60,000	9.0	34,000	1,790	8738102
	CAPT4961*4A*	G*VC80805D*B*	54,000	42,800	14.5	11.3	52,000	41,800	60,000	9.0	34,000	1,650	9924320
	CHPF4860D6D*+MBVC2000*-1A*+TXV		54,000	42,800	15.5	12.0	52,000	41,800	58,000	8.5	32,000	1,890	8669638
	CHPF4860D6D*+TXV	G*VC961005CNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,725	8738087
	CHPF4860D6D*+TXV	G*VM971005CNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,725	8738088
	CHPF4860D6D*+TXV	G*VC961205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,880	8738089
	CHPF4860D6D*+TXV	G*VM971205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,880	8738090
	CHPF4860D6D*+TXV	G*VC80805C*B*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,820	8738091
	CHPF4860D6D*+TXV	G*VC81005C*B*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,790	8738092
	CHPF4860D6D*+TXV	A*VC961005CNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,725	8738103
	CHPF4860D6D*+TXV	A*VM971005CNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,725	8738104
	CHPF4860D6D*+TXV	A*VC961205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,880	8738105
	CHPF4860D6D*+TXV	A*VM971205DNA*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,880	8738106
	CHPF4860D6D*+TXV	A*VC80805C*B*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,820	8738107
	CHPF4860D6D*+TXV	A*VC81005C*B*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,790	8738108
	CHPF4860D6D*+TXV	G*VC80805D*B*	54,500	43,200	15.5	11.5	52,600	42,200	60,000	9.0	34,000	1,650	9924321
	CSCF4860N6D*+TXV	G*VC961005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,725	8738093
	CSCF4860N6D*+TXV	G*VM971005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,725	8738094
	CSCF4860N6D*+TXV	G*VC961205DNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,880	8738095
	CSCF4860N6D*+TXV	G*VM971205DNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,880	8738096
	CSCF4860N6D*+TXV	G*VC80805C*B*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,820	8738097
	CSCF4860N6D*+TXV	G*VC81005C*B*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,790	8738098
	CSCF4860N6D*+TXV	A*VC961005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,725	8738109
CSCF4860N6D*+TXV	A*VM971005CNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,725	8738110	
CSCF4860N6D*+TXV	A*VC961205DNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,880	8738111	
CSCF4860N6D*+TXV	A*VM971205DNA*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,880	8738112	
CSCF4860N6D*+TXV	A*VC80805C*B*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,820	8738113	
CSCF4860N6D*+TXV	A*VC81005C*B*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,790	8738114	
CSCF4860N6D*+TXV	G*VC80805D*B*	54,000	42,800	15.0	11.5	52,000	41,800	58,000	8.5	34,000	1,650	9924322	

[^] Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F


⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240


⁵ HSPF = Heating Seasonal Performance Factor

⁶ Heating capacity at 17°F outdoor

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

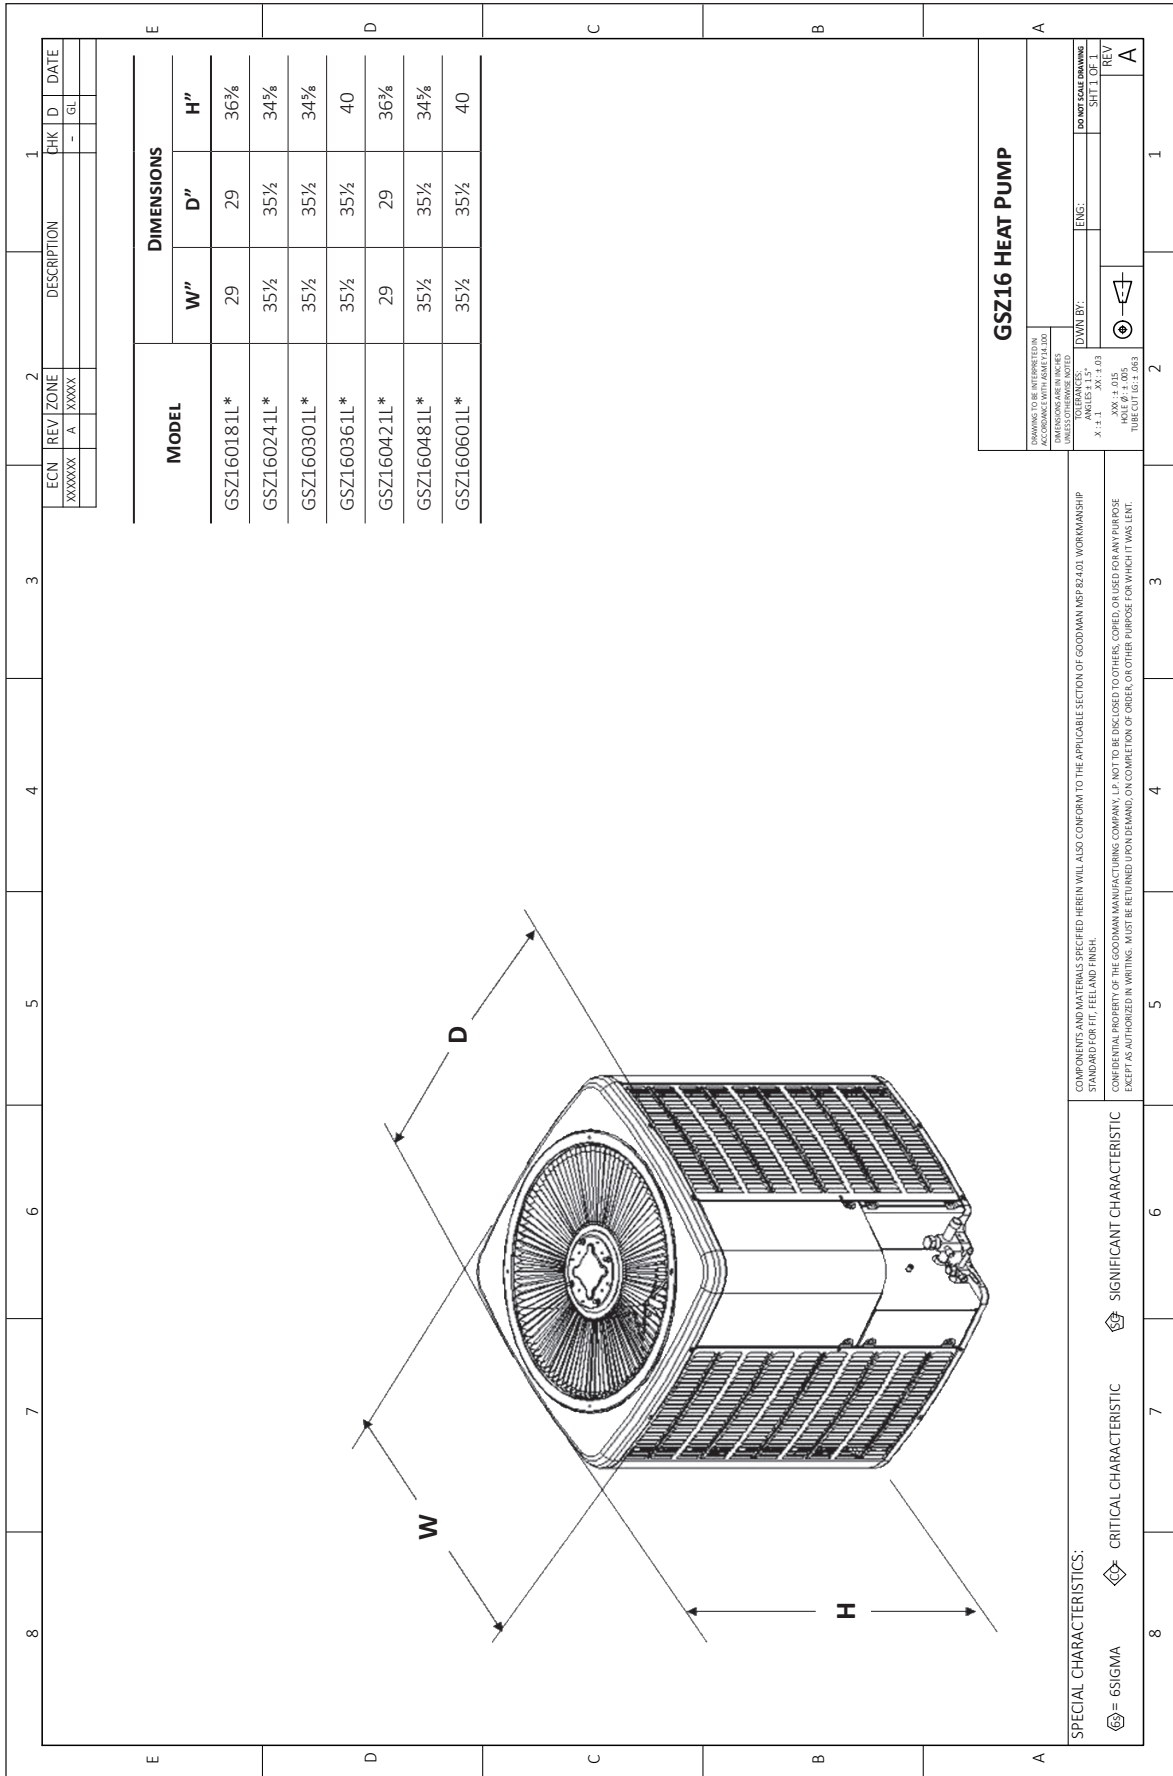

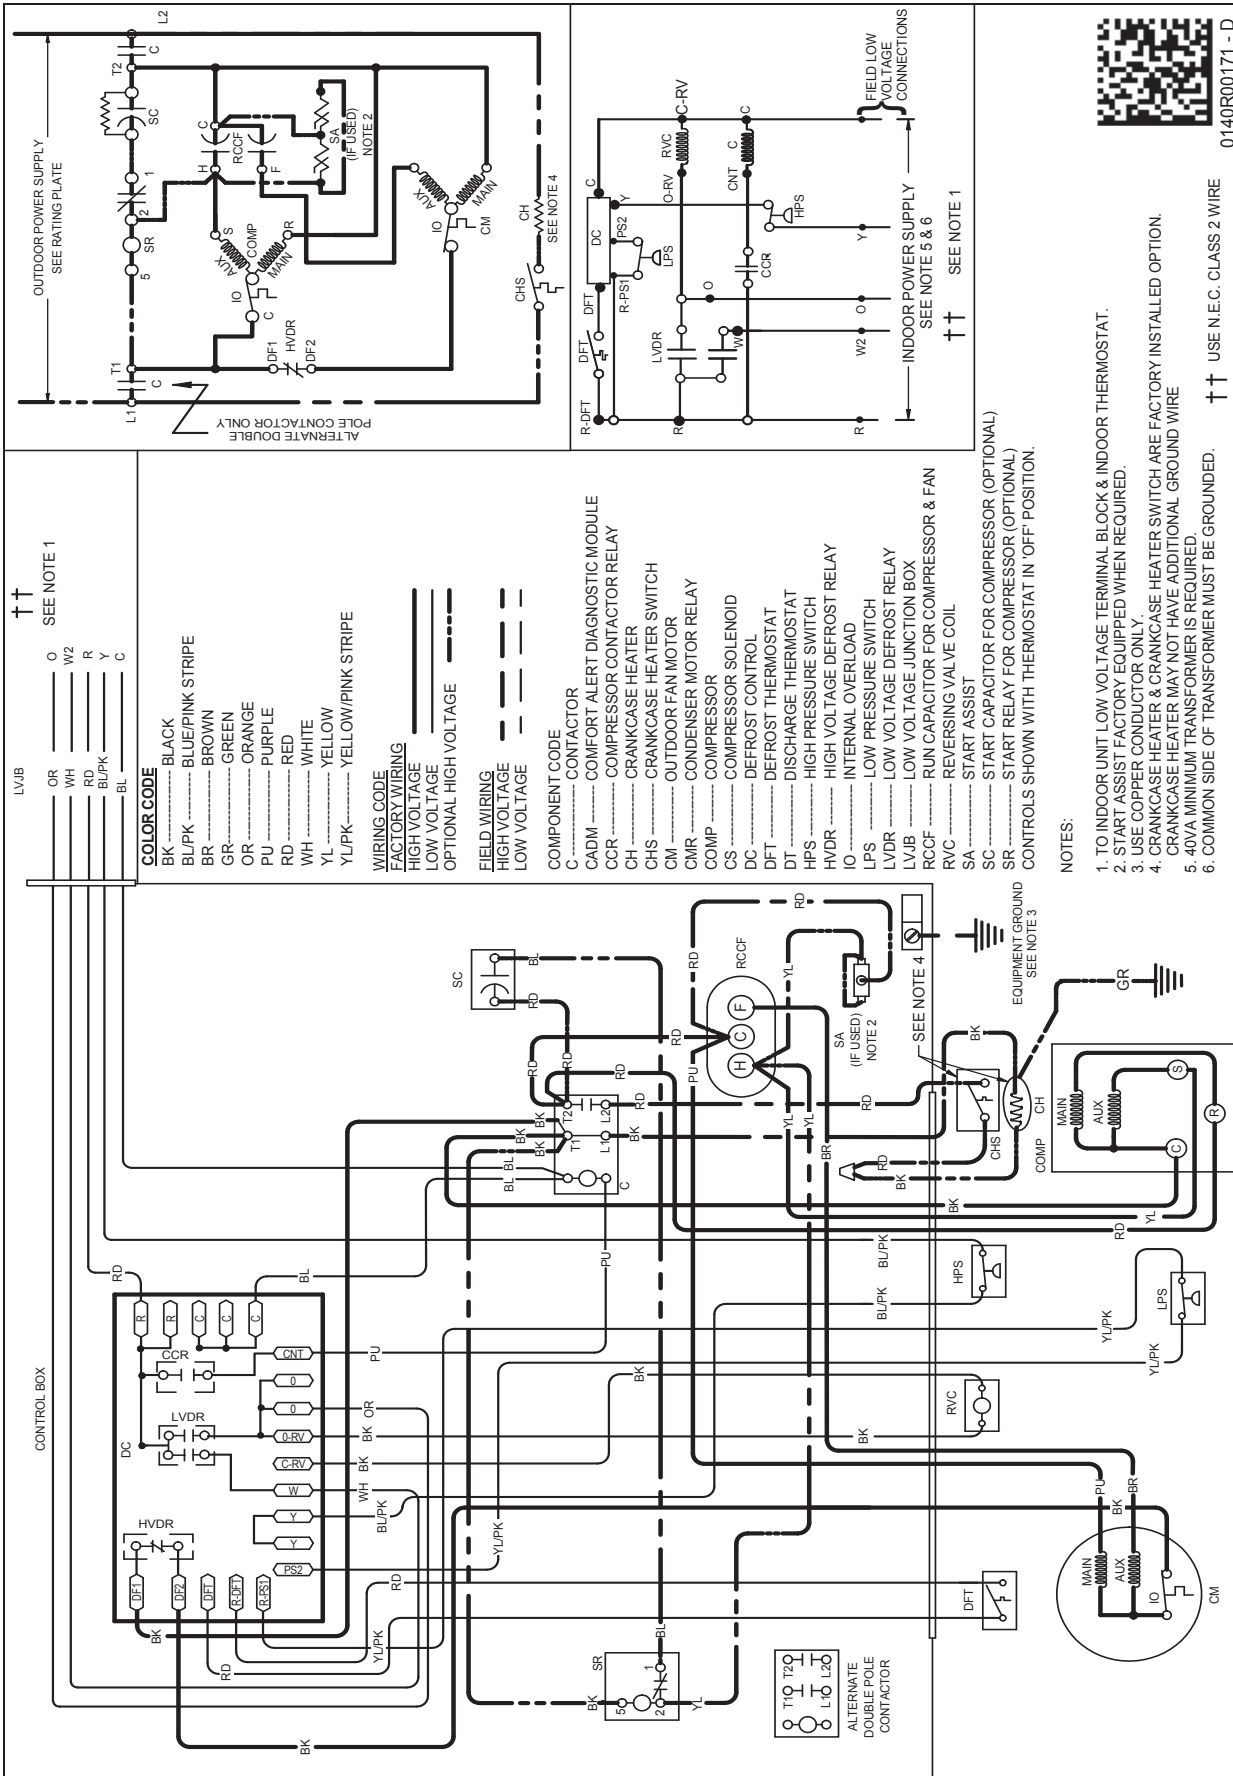


0140R00171 - D

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

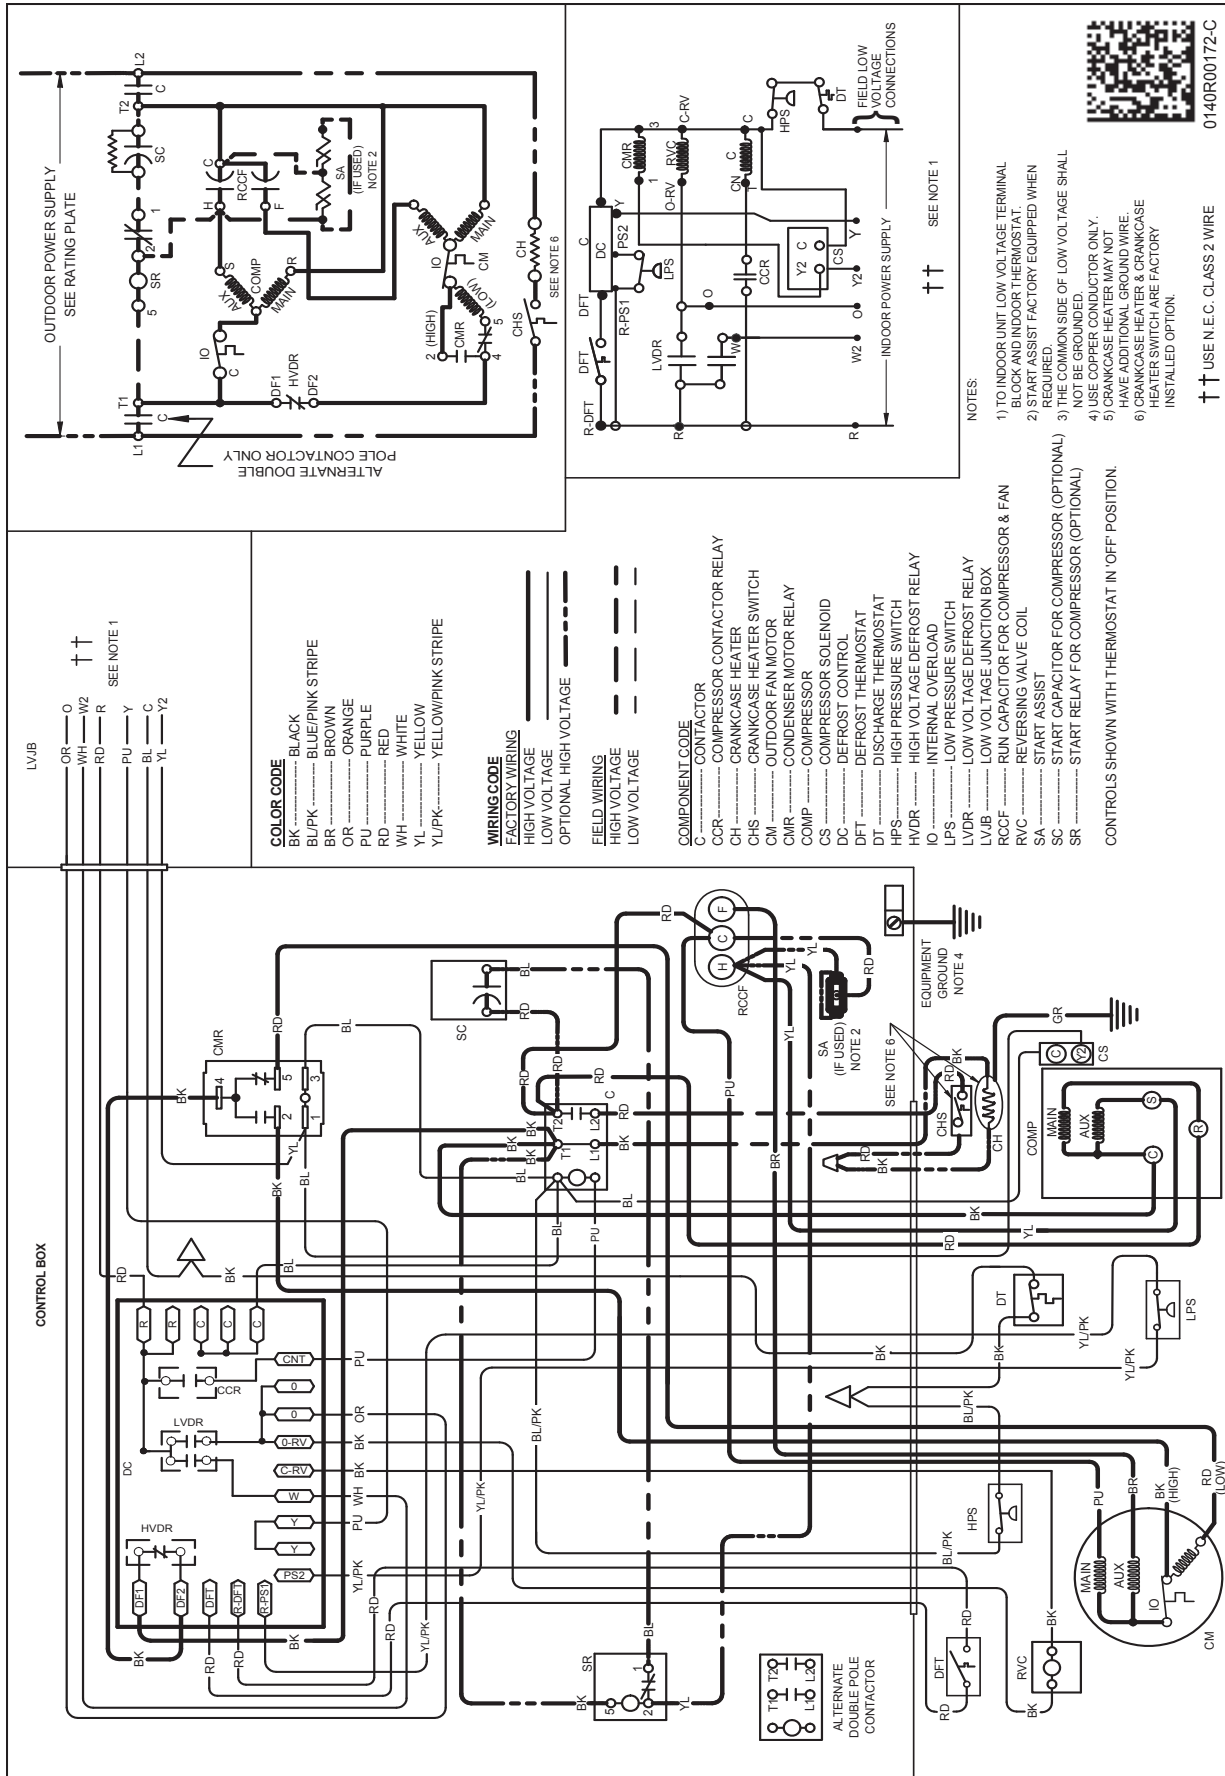

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



0140R00172-C

MODEL #	DESCRIPTION	GSZ16 018	GSZ16 024	GSZ16 030	GSZ16 036	GSZ16 042	GSZ16 048	GSZ16 060
ABK-20	Anchor Bracket Kit*	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	
CSR-U-3	Hard-start Kit							X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat w/ Lockout Stat	X	X	X	X	X	X	X
TX2N4A ³	TXV Kit	X	X					
TX3N4	TXV Kit			X	X			
TX5N4	TXV Kit					X	X	X

⁰ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

³ Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.