

#### DESCRIPTION

- Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Transitional style
- Single mount
- Vandal resistant aerator

### Flexible stainless steel supply lines


### **OPERATION**

- Adjustable sensor activation distance
- Vandal Mode: 30 second time-out feature
- Sentinel Flow: Eliminates stagnant water in supply lines every 24 hours
- (factory setting off)
  Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning Battery 4(AA) or AC powered
- Low battery indicator light
- Battery life: Up to 6 years or 350,000 cycles\* Built-in mixing-manual on/off handle (8554AC/8554 models)
- In-line filters included

• 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow **STANDARDS** 

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ( compliant

# **Specifications**



## **Electronic Faucet Above-Deck Transitional Style**

**Model:** 8554, 8554AC (mixing) **NOTE: DESIGNED TO BE INSTALLED** THROUGH ONE HOLE 1-1/4" MIN. DIA. (see the following page for model 8554AC)

# WARRANTY Warranted for 5 years against material or manufacturer defects 8554 **ACT** OMPLIAN 7-1/4" (184mm) 99557 8554 (128mm) φ 99558 1-1/2" Maximum Deck Thickness when using a Deck Escutcheon (38mm) CRITICAL DIMENSIONS (DO NOT SCALE)

<sup>\*</sup> Typical alkaline battery life at 200 uses per day is about 3 years



# **Specifications**

**AC Adapter Model:** 174058

**DESCRIPTION** 

• Used to power 1-8 faucets

**INPUT** 

• 100-240 VAC

• 50-60 Hz

• 0.5 A

NEMA 1-15P

OUTPUT


12 VDC1.5 A

• 1.5 A

6ft lead

**EFFICIENCY LEVEL: V** 

UL60950 - 1



AC Adapter Model: 174058

Connects up to 8 faucets

Y-Splitter

Model: 174059 **DESCRIPTION** 

• Used to power faucets #2 - #8 off of a single adapter (174058)

**INPUT** 


See dimensions in schematic below

**OUTPUT** 

· See dimensions in schematic below



Y-Splitter Model: 174059

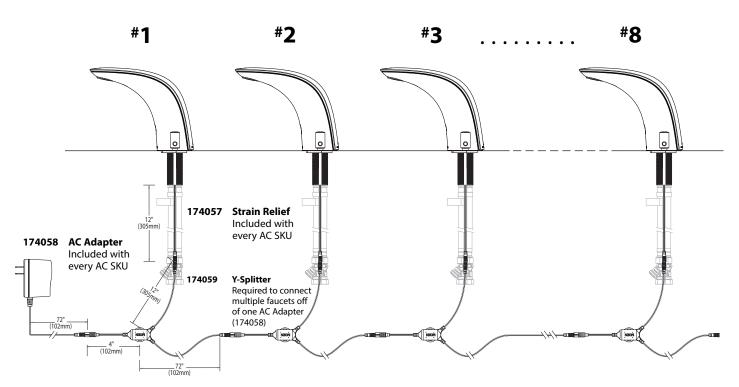

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)