




Z415BL

BODY ASSEMBLY W/ "TYPE BL" STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

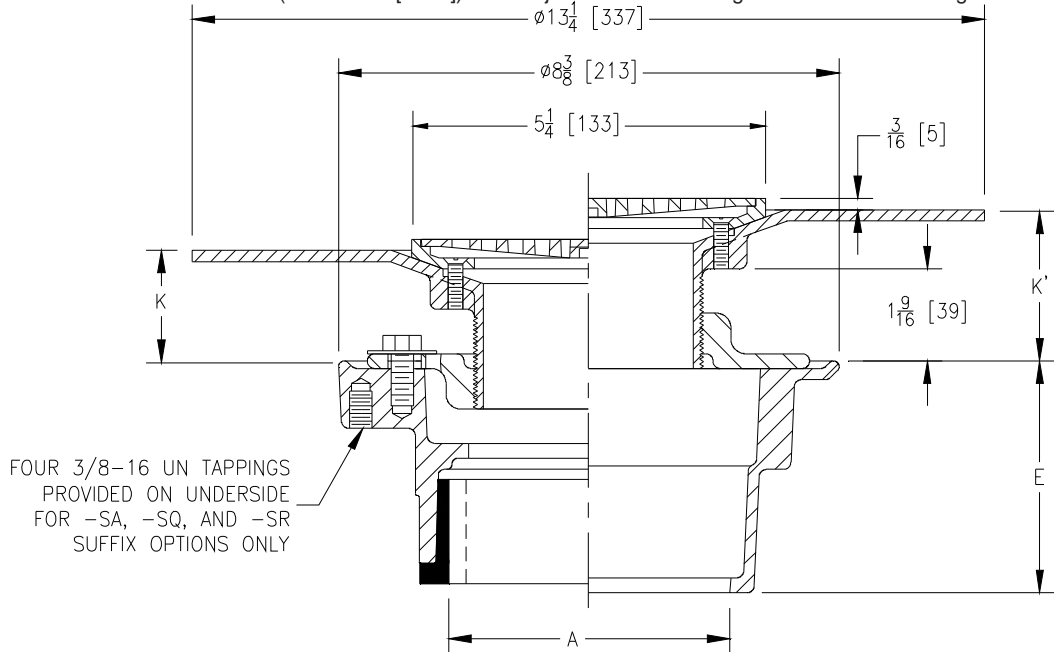

Strainer Designated	Dimensions In Inches				Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]	
	A - Pipe Size	K		K'			
-5BL	2-3-4-6 [51-76-102-152]	Min.	Max.	Min.	Max.	14 [6]	7 [45]
		7/8 [22]	2-1/4 [57]	1-11/16 [43]	3 [76]		

ENGINEERING SPECIFICATION: ZURNZN415BL

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE BL" D.C.C.I. wide flanged head and polished nickel bronze, light-duty strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2 thru 4 [51 thru 102]	_____ IC Inside Caulk	3-7/8 [98]
2 thru 4 [51 thru 102]	_____ IG Inside Gasket	3-7/8 [98]
2 [51]	_____ IP Threaded	2-3/8 [60]
3 [76]	_____ IP Threaded	2-5/8 [67]
4 [102]	_____ IP Threaded	2-7/8 [73]
6 [152]	_____ IP Threaded	2-3/4 [70]
2 thru 4 [51 thru 102]	_____ NH No-Hub	3-7/8 [98]
2 thru 4 [51 thru 102]	_____ NL Neo-Loc	3-3/4 [95]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

- | | |
|--|--|
| _____ -AR Acid Resisting Epoxy Coated Cast Iron | _____ -U 1 thru 3 [25 thru 76] High Extension Adapter |
| _____ -CP Chrome-Plated Bronze Top | _____ -VP Vandal-Proof Secured Top |
| _____ -G Galvanized Cast Iron | _____ -Y Sediment Bucket |
| _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) | _____ -18 Leveling Ring (See Z400-18) |
| _____ -SA Stabilizer Assembly (See Z1035) | _____ -90 90° Threaded Side Outlet Body Assembly (2 [51], 3 [76] Only) |
| _____ -SH Four (4) Securing Holes | |
| _____ -SQ Stabilizer Q-Deck (See Z1035-Q) | |
| _____ -SR Stabilizer Ring | |
| _____ -TC Neo-Loc Test Cap Gasket (2-4 [51-102] NL Bottom Outlet Only) | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. K	DATE: 06/20/11	C.N. NO. 121441
DWG. NO. 58790	PRODUCT NO. Z415BL	

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292